


# Product APPLICATION Guide

## 30mm Panel Mount Alarms with Flat Blades

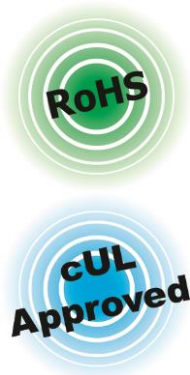

### Model List

RoHS Part No.	Min Sound Level dBa (2 ft)	Freq. (Hz)	Operating Voltage	Max Current (mA)	Size Dia x Len (in)	Sound Type
<b>Continuous Tone -- Loud Sound Level</b>						
SC616N-BTR	80 - 95	2900	6 - 16 Vdc	22	1.69 x 0.81	Continuous
SC628AN-BTR	80 - 95	2900	6 - 28 Vac/dc	30	1.69 x 0.81	Continuous
SC628N-BTR	80 - 90	2900	6 - 28 Vdc	16	1.69 x 0.81	Continuous
<b>Continuous Tone – Medium Sound Level</b>						
SC628-BTR	68 - 80	2900	6 - 28 Vdc	18	1.69 x 0.81	Continuous
SC628D-BTR	60 - 75	1900	6 - 28 Vdc	18	1.69 x 0.81	Continuous
SC628H-BTR	68 - 80	4500	6 - 28 Vdc	30	1.69 x 0.81	Continuous
<b>Fast Pulse Tone -- Loud Sound Level</b>						
SC616NP-BTR	80 - 95	2900	6 - 16 Vdc	22	1.69 x 0.81	Fast Pulse
<b>Fast Pulse Tone- Medium Sound Level</b>						
SC628P-BTR	68 - 80	2900	6 - 28 Vdc	26	1.69 x 0.81	Fast Pulse
<b>Chime Tone- Medium Sound Level</b>						
SC616CP-BTR	68 - 78	2900	6 - 16 Vdc	23	1.69 x 0.81	Chime

**Note: Order with P/N ACC03 for Waterproof Ratings**

Call 317-612-1000 or Visit [www.mallory-sonalert.com](http://www.mallory-sonalert.com) for More Details