

# Open-Frame Product Selection Guide



**bel** POWER  
SOLUTIONS &  
PROTECTION

a bel group

## AC/DC Industrial Portfolio

Model Number	Connector Type	Voltages	Size	V Adjust	Air	Convection
ABC40-1xxxG	Header	5, 12, 15, 24, 48	2x4x1.2	±10%	40	40
ABC40-3xxxG	Header	5, 12, -12 5, 12, -12 5, 15, -15 3.3, 5, -12	2x4x1.2	±10% ±10% ±10% ±10%	40	40
ABC60-1xxxG	Header	5, 12, 15, 24, 48	2x4x1.2	±10%	60	60
ABC60-3xxxG	Header	5, 12, -12 5, 12, -12 5, 15, -15 3.3, 5, -12	2x4x1.2	±10% ±10% ±10% ±10%	60	60
ABC150-1xxxG	Header or Screw Terminal	5, 12, 15, 24, 48	2x4x1.3	±3%	150	110
ABC200-1xxxG	Header	12, 15, 24, 48	2x4x1.5	±3%	200	60
ABC201-1xxxG	Header or Screw Terminal	5, 12, 15, 24, 30, 48	3x5x1.5	±3%	200	160
ABC225-1xxxL	Header	12, 15, 24, 30, 48, 58	2 x 4 x 1	±10%	225	112.5
ABC300-1xxxG	Screw Terminal	5, 12, 15, 24, 30, 48	3x5x1.5	±3%	300	240
ABC350-1xxxL	Header or Screw Terminal	12, 15, 24, 30, 48, 58	3x5 x 1	±10%	350	200
ABC400-1xxxG	Header	12, 24, 48	3x5x1.5	±3%	400	120
ABC450-1TxxG	Screw Terminal	5, 12, 15, 24, 30, 48	4 x 6.5 x 1.6	±3%	450	300
ABC600-1xxxG	Screw Terminal	12, 15, 24, 28, 48	5 x 8 x 1.6	±10%	600	420




### Features and Benefits

- No Minimum Load Required
- High Convection Rating
- EMI Level B
- -20 to +70 C Operation
- 600W supplies offer I2C communication bus
- Adjustable main output
- The L Series low-profile offers supplies under 1" height

### Applications

- Instrumentation
- Process Control
- Lighting
- Test Equipment
- Factory Automation
- Mil COTS

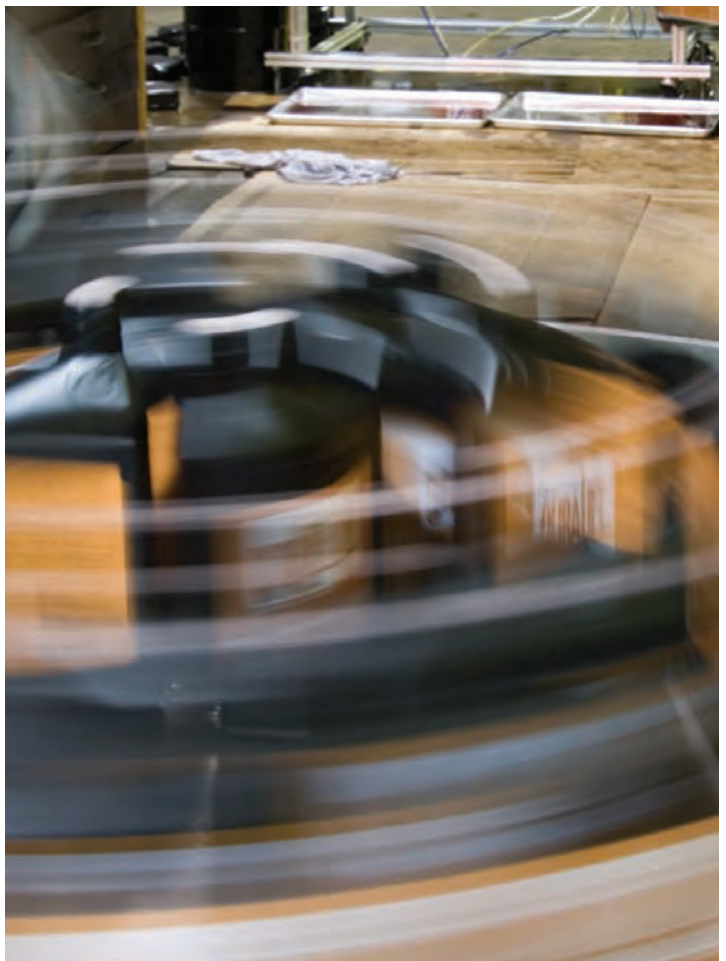

## AC/DC Medical Portfolio

Model Number	Connector Type	Voltages	Size	V Adjust	Air	Convection
MBC40-1xxxG	Header	5, 12, 15, 24, 48	2 x 4 x 1.2	±10%	40	40
MBC40-3xxxG	Header	5, 12, -12 5, 24, -12 5, 15, -15 3.3, 5, -12	2 x 4 x 1.2	± 10%	40	40
MBC60-1xxxG	Header	5, 12, 15, 24, 48	2 x 4 x 1.2	±10%	60	60
MBC60-3xxxG	Header	5, 12, -12 5, 24, -12 5, 15, -15 3.3, 5, -12	2 x 4 x 1.2	± 10%	60	60
MBC150-1xxxG	Header or Screw Terminal	5, 12, 15, 24, 48	2 x 4 x 1.3	±3%	150	110
MBC201-1xxxG	Header or Screw Terminal	5, 12, 15, 24, 30, 48	3 x 5 x 1.5	±3%	200	160
MBC225-1xxxL	Header	12, 15, 24, 30, 48, 58	2 x 4 x 1	±10%	225	112.5
MBC250-1xxxG	Screw Terminal	12, 24, 48	3 x 5 x 1.5	±3%	250	120
MBC300-1xxxG	Screw Terminal	5, 12, 15, 24, 30, 48	3 x 5 x 1.5	±3%	300	240
MBC350-1xxxL	Header or Screw Terminal	12, 15, 24, 30, 48, 58	3 x 5 x 1	±10%	350	200
MBC450-1TxxG	Screw Terminal	5, 12, 15, 24, 30, 48	4 x 6.5 x 1.6	±3%	450	300
MBC600-1xxxG	Screw Terminal	12, 15, 24, 28, 48	5 x 8 x 1.6	±10%	600	420

NOTE: For Class 2 product, add "-2" suffix




### Features and Benefits

- 3rd Edition Medical Safety Approvals
- 2 x MOPP
- -20 to +70 C Operation
- High Convection Rating
- EMI Level B
- 600W supplies offer I2C communication bus
- Adjustable main output
- The L Series low-profile offers supplies under 1" height

### Applications

- Drug pumps
- Ultrasound
- Monitoring
- Diagnostic
- Dialysis
- Home Health Care





**bel** POWER  
SOLUTIONS &  
PROTECTION

a bel group

152 North 3rd Street,  
Suite 805,  
San Jose, CA 95112

For more information,  
please contact us:

North America  
+1.866.513.2839

Asia-Pacific  
+86.755.29885888

Europe, Middle East  
+353 61 225 977

[belpowersolutions.com](http://belpowersolutions.com)